


40G QSFP+ MPO Transceiver



40G QSFP+ MPO SR4

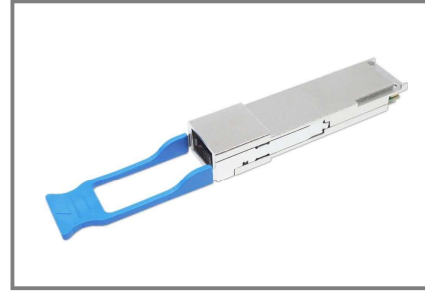

40G QSFP+ MPO PSM4-LR

Features

- Compliant with IEEE802.3ba 40GBASE-SR4/40GBASE-LR4
- Compliant with SFF-8436 QSFP+ MSA
- Support InfiniBand QDR
- 4 independent full-duplex channels
- Up to 11.2Gbps data rate per channel
- Hot Pluggable
- 850nm/1310nm laser transmitter
- MPO-12 receptacle connector
- 2-wire interface for management and diagnostic monitor compliant with SFF-8436, SFF-8636
- Single 3.3V power supply
- Link distance 100m over MM OM3 fiber/10km over SM fiber
- RoHS Compliant

Ordering Information

Date Rate	Form Factor	Connector	Fiber Type	Distance	Wavelength	TX Power	RX Sensitivity	Temperature	Remark	Part Number
40G	QSFP+	MPO	MMF	150m	850nm	-6.0~+2.4 dBm	≤ -10.2 dBm	0~70°C	SR4	YTM-6C-1M2Cx
40G	QSFP+	MPO	SMF	10km	1310nm	-5.5~+2.3 dBm	≤ -12.6 dBm	0~70°C	PSM4-LR	YTM-6C-2S7Cx